
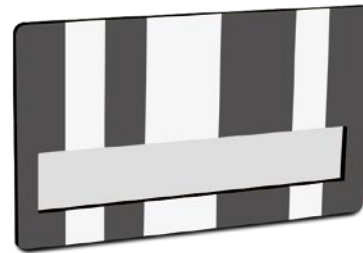


DESIGN AND PRODUCTION INSTRUCTIONS FOR STAFF EXCLUSION TAGS


The Staff Exclusion plugin (patent pending) works with the Staff Exclusion pattern designed by Xovis, which can be printed on staff name tags, pins etc.

CUSTOMIZATION AND PRODUCTION*


Production of the tags is the responsibility of the buyer (e.g. system integrator, end customer, etc.). Xovis does not offer tag customization nor production but provides the specifications for the pattern design and the instructions for individual production. For the validation of custom tag production or for the evaluation of the plugin, proven Staff Exclusion name tags can be acquired from Xovis. Two color variations (red/white and basalt gray/white as shown below) are available. Contact Xovis for more details and pricing.

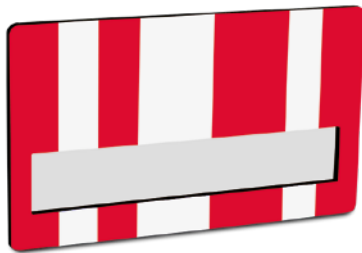


WEARING INSTRUCTIONS

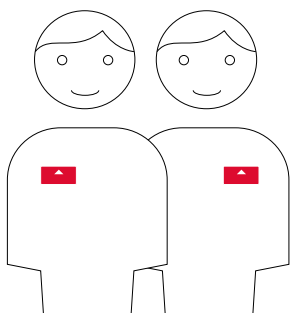


Staff must wear the pattern on the chest area. The Staff Exclusion plugin can be set to detect the pattern on either side

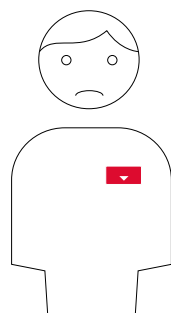

The pattern is non-symmetrical, meaning the correct side of the pattern must be pointing up. We recommend to mark the correct orientation (e.g. small arrow)

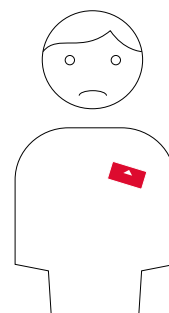


The pattern needs to be worn horizontally and must not stick out

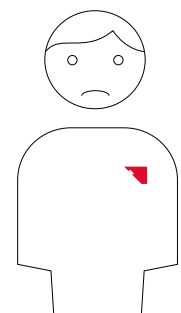

The tag must not be covered (e.g. jacket, long hair, scarf, tie etc.)

MANUFACTURING INSTRUCTIONS

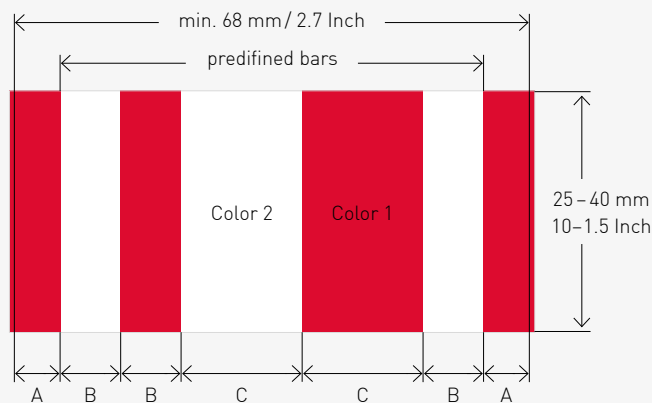

- Color 1 (bars) = darker color
- Color 2 (background) = lighter color

A ≥ 6 mm / 0.2 Inch	customizable
B = 8 mm / 0.3 Inch	predefined
C = 16 mm / 0.6 Inch	


Print Specification:

- Matt finish, no glossy varnish
- Verify color contrast here:

www.xovis.com/tools/colorcontrast

Height, width and shape

- The pattern cannot be altered. It must be a rectangle.
- The height of the pattern must be between 25 – 40 mm (1.0–1.5 Inch).
- The total width of the pattern must be at least 68 mm (2.7 Inch). It can be adjusted partly, meaning the five inner color bars (B 8 mm / 0.3 Inch and C 16 mm / 0.6 Inch) are predefined and the two outer bars (A) can be larger than or equal to 6mm (0.2 Inch).
- The pattern is non-symmetrical, so the correct side must be pointing up when wearing the tag.

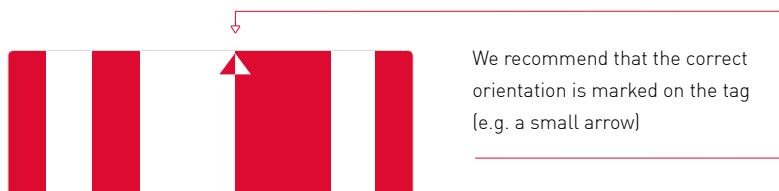

Color

- The pattern must be two-colored, and the colors must have a certain minimum contrast. The background must be lighter (three bars, color 2) and the bars darker (four bars, color 1). Use the Xovis color contrast tool www.xovis.com/tools/colorcontrast to verify the contrast of the desired colors.
- The order of color 1 and color 2 is predefined and must not be interchanged. Color 1 always needs to be the darker of the two colors.

Material and surface

- We recommend the pattern to be printed on a flat tag made of a stable material (e.g. aluminum, cardboard, rigid plastic, etc.). The functional capability of the pattern on a flexible material (e.g. stitching or printing on fabric or soft plastic, etc.) has not been tested by Xovis.
- The surface of the pattern must have a matt finish. Light reflection may cause problems, so do not use a glossy varnish, transparent plastic cover, etc.